




PECONIC GREEN GROWTH

# NORTH SEA Fact Sheet

Water sustains life and symbolizes purity. But water quality is degrading. Our ground and surface waters need protection. The aquifers are not only sources of drinking water, but flow horizontally to surface waters, impacting the marine health of our bays. Excess nitrogen compounds are a critical cause of algal blooms, which lower oxygen levels, create toxins, and ultimately cause fish kills. Contaminants of emerging concern, such as pharmaceuticals and personal care products, need to be treated before being released to ground and surface waters. Poor water quality will ultimately impact community character and vitality, which are especially relevant for our coastal and tourist economies.

The following is a snapshot of local issues that impact excess nitrogen loading. More detailed maps are available at <http://peconicgreengrowth.org/community-maps-2014/> where you can find the areas needing priority action, as well as identify conditions relevant to your home. Visit our website to learn about options for upgrading your wastewater system to help protect your environment.


## LI Water Quality Impairments 2016

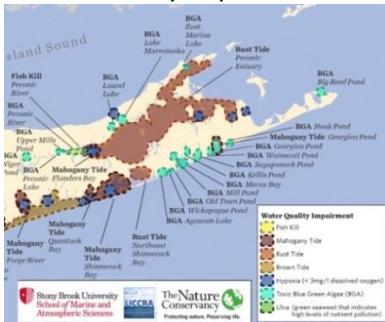

## EXCESS NITROGEN (N) LOADING

- Excess nitrogen compounds can be harmful to human health.
- Our surface waters are 20 times more susceptible to N loads than maximum contaminant levels for drinking water.
- Excess N feeds algal blooms, which in turn create toxins. These impact fish and shellfish formation and survival rates.
- Excess nitrogen contributes to declines in eel grass and wetland grass beds. Their loss impacts marine habitats and reduces their usefulness as property buffers in storms.
- The algal blooms are becoming more numerous and potent.

## Nitrogen Sources

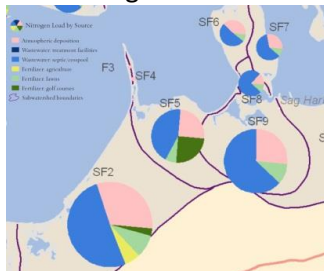


Courtesy TNC and Prof. Christopher Gobler

## SOURCES OF EXCESS NITROGEN

North Sea lies mostly in the SF2 subwatershed. This subwatershed is responsible for 6 % of all the nitrogen loading in the Peconic Estuary (of 43 subwatersheds). Sources are estimated as coming from:

- 58% septic/cesspool systems
- 27% atmospheric deposition
- 8% fertilizer from lawns
- 5% fertilizer from agriculture
- 3% fertilizer from golf courses

## Water Quality Impairments

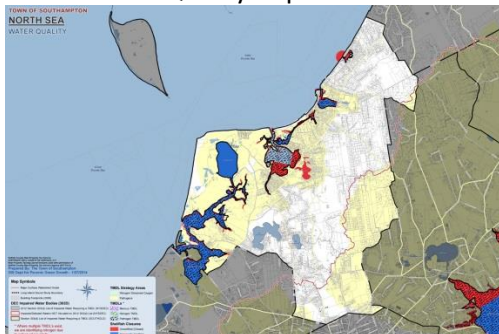


## NORTH SEA WATER QUALITY

- Rust Tide (algae) has been repeatedly present in the adjacent bays of the Peconic Estuary.
- Fresh Pond, Fish Cove, Turtle Cove and parts of North Sea Harbor are closed to shellfishing.
- Wooley Pond, Davis Creek, Scallop Pond, West Neck Creek, Little Sebonac Creek, Sebonac Creek, Bullhead Bay, and parts of North Sea Harbor are seasonally certified for shellfishing.
- TMDL's for pathogens exist for Wooley Pond, North Sea Harbor, Davis, West Neck, Little Sebonac, Sebonac, and West Neck Creeks, and Bullhead Bay. Big Fresh Pond, Little Fresh Pond and Scallop Pond are listed as impaired needing a TMDL.




PECONIC GREEN GROWTH


### Soils Suitable for Septic Treatment

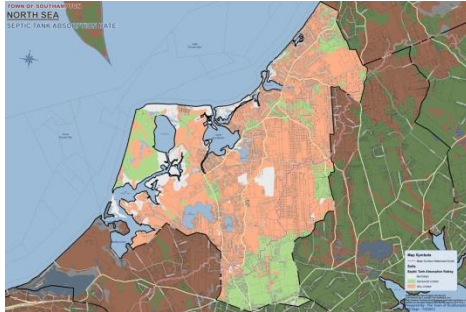


### Depths to Groundwater

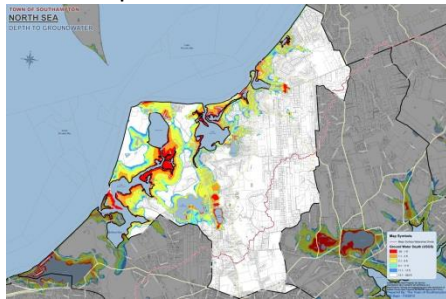

### Lot Sizes in North Sea

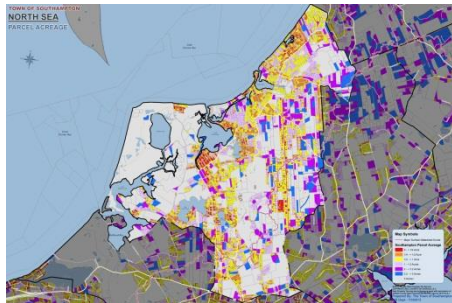

By 2080 we estimate that 163 buildings in North Sea will be inundated.

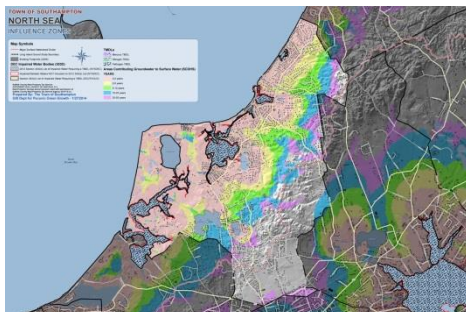

## NORTH SEA Fact Sheet

### CESSPOOLS VS. SEPTIC SYSTEMS

CESSPOOLS, which are often found on properties developed before 1973, dispense all wastewater with no treatment directly to the ground. Dissolved solids, contaminants and pathogens can percolate to groundwater. The current code requires SEPTIC SYSTEMS, which places an enclosed tank before the leaching pits (which resembles a cesspool) or field. In the tank, fats rise and solids settle to the bottom, where microbes treat the solids. Clarified effluent is dispensed, with 10% of nitrogen mitigated. New, enhanced systems can lower nitrogen levels by 50 – 90%. 2,708 buildings (87%) in North Sea are on soils considered unsuitable for onsite septic treatment, as they drain too quickly.

### DEPTH TO GROUNDWATER and FLOOD/SLOSH ZONES

The Suffolk County Sanitation Code (SCSC) requires a 3-foot separation distance from the bottom of wastewater systems to groundwater to allow for natural treatment and filtering of effluent. When groundwater is less than 7 feet below grade, there can be difficulties siting the system. Where depths to groundwater are less than 13 feet, systems are likely to become noncompliant as groundwater elevations rise due to climate change. In North Sea 1,132 buildings (37%) have depths to groundwater of less than 13 feet. 30% are in SLOSH zones.

### SMALL LOT SIZES

In North Sea **41%** (1,212) of the developed lots are **nonconforming** to the 20,000 SF (nominal half-acre) minimum lot sizes SCDHS requires to dilute wastewater to acceptable contamination levels for drinking water. If a community relies on individual wells, this minimum lot size is even larger – a nominal one acre. The contaminant concentrations discharged from these systems are higher than code. There are 444 (15%) developed, unsewered parcels sized ¼ acre or less in North Sea not in a sewer district.

### CLIMATE CHANGE

By 2080 an estimated 573 buildings in North Sea will most likely have their wastewater treatment systems compromised due to inadequate horizontal distances to surface waters.

### INFLUENCE ZONES

*Denoting the Time it Takes Groundwater to Reach Surface Waters*

1.643 or **53%** of the buildings in North Sea are in the “Pink Zone,” where it only takes 0-2 years for groundwater and contaminants to reach surface waters. It makes sense to prioritize improvements in the “pink” zone, as the beneficial impacts will be felt more quickly.